

## THERMAL CUTTING FUME extraction BOMAKSAN SOLUTIONS

**CATALOGUE** 



OVERVIEW 02



#### **HEALTH RISKS**

Being exposed to fumes generated by welding or thermally generated particles is a significant health and safety concern for manufacturers. The potential health hazards span from minor illnesses like a sore throat and eye irritation to more severe conditions like metal fume fever, and can even extend to long-term or fatal illnesses such as cancer. In 2019, International Agency of Research classified weld fume as a known carcinogen.

- Sore Throat
- Eye Irritation


- Metal Fume Fever
- Cancer



#### **LOSS OF PRODUCTION**

Unregulated dust and fumes also have negative effects on factories efficiency. Dust and particles arises from metalworking processes can penetrate machinery or electrical enclosures, leading to operational downtimes and reduced efficiency. Additionally, these fumes can build up on inventory, necessitating extra cleaning efforts and maintenance work. Moreover, qualified workers would like to work dust-free environments. So they make their choices accordingly.

- Unefficient Working Environment
- Increased Downtime
- Additional Clean Up Works
- Increased Malfunction in Machines

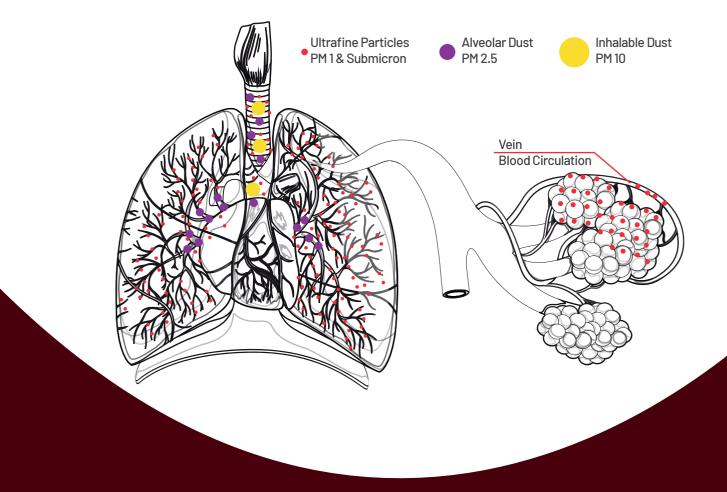

# BEWARE OF YOUR SHOPFLOOR AIR QUALITY

in 2019, the International Agency for Research on Cancer (IARC) classified weld fume as a known carcinogen that can lead to lung cancer. This new foundings makes welding fume extraction and filtration systems much more important for health and safety of workers.



#### PKM - MODULAR CUTTING TABLES

Well designed cutting tables are essential for efficient dust collection systems. If cutting tables are not designed well, than the capacity of the filter unit and thus energy consumption of the dust collection system gets higher. So it is very important to have well designed cutting bench for thermal cutting dust and fume collection systems.

Well designed cutting tables should consider slag removal, dust collection efficiency, thermal durability and easy maintenance.

Bomaksan branded PKM series modular cutting tables are great solution for thermal cutting processes. PKM series are easy to install and maintain while providing super efficient extraction performance with optimum modula size.

LOWER TOTAL
COST OF OWNERSHIP

HIGH EXTRACTION PERFORMANCE

LOWER ENERGY CONSUMPTION

OPTIMUM MODULA SIZE


EASY SLAG REMOVAL

EASY INSTALLATION





Jet-PulseDust Collector

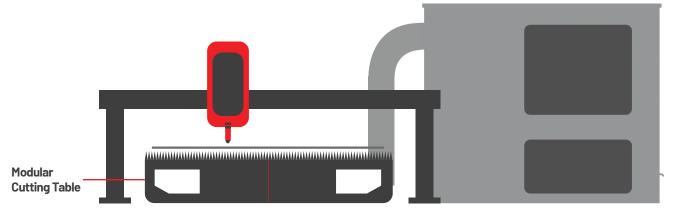



#### F | JET-PULSE DUST COLLECTORS

Bomaksan offers wide range of jet-pulse dust collectors span from plug & play compact filter units to modular filter units. Bomaksan covering different advantages of different dust collector technologies; Horizontal round cartridges, vertical round cartridges and pleated flat panel filters have different advantages in some specific projects. Thats the reason why we have all types in our product ranges.

Designing a jet-pulse collector is not easy job. Designer should consider the filtration velocity, can velocity, valves angles, valve sizes, header tank sizes etc. So it requires a excellent specialities to produce great dust collectors. With over 35 years of experience, Bomaksan provides perfect jet-pulse cartridge filters with superior performance to it's clients.

#### **PRODUCT OFFERINGS**





EASY INSTALLATION

HIGH EFFICIENT FILTRATION

HIGH EXTRACTION
PERFORMANCE

PLUG & PLAY
FILTER UNITS

AUTOMATIC
JET-PULSE CLEANING

INTEGRATED
SPARK ARRESTOR

## **Discover**The Bomaksan Expertise

We know selecting the right solution for your workshop is a big challenge. Experienced Bomaksan engineers, project designers and solution partners can help you find the best solution for your workshop. Get in touch with Bomaksan Team now and enjoy the getting great support and knowledge.



### **LEV SOL. FOR ROBOTIC CUTTING**

Robotic thermal cutting can generate significant amounts of metal particles, which, if not controlled, can disperse throughout the workspace. Efficient fume extraction is crucial to prevent these airborne contaminants from affecting the health of workers and polluting the environment.

Easiest way to apply LEV system for robotic thermal cutting application is to install a High Vacuum On Torch Filter Unit – Mikrofil MIDI. However it is not always applicable to use such products because of process requirement. In this case, a professional LEV design or General Hall Ventilation (GHV) or combination of both LEV and GHV is required.

Designing an LEV system for robotic thermal cutting applications could be challenging. Designers need to consider robot movement, positioner movement, bridge movement and material flow (supply and deliver). This type of design requires great experience and know-how. Bomaksan engineers, project designers and solution partners can help you along the way.


#### **PRODUCT OFFERINGS**










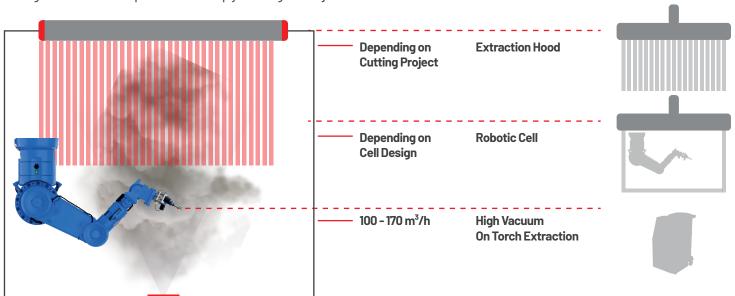

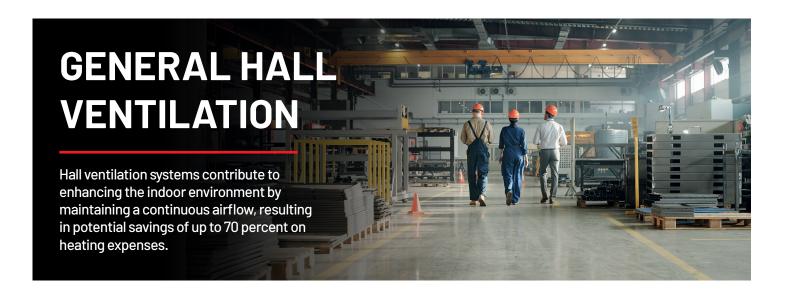

#### **GENERAL HALL VENT. (GHV)**

In the context of thermal cuttign fume extraction systems, General Hall Ventilation (GHV) refers to the overall air movement and air quality management within a workshop or facility. Thermal cutting processes can produce hazardous fumes and particulates that need to be effectively controlled to ensure the safety and health of workers in the vicinity.

Incorporating general hall ventilation as part of a thermal cutting fume extraction system involves designing the facility's HVAC (Heating, Ventilation, and Air Conditioning) system to ensure that a continuous flow of fresh air is circulated throughout the workspace. This helps dilute and disperse any potentially harmful welding fumes that might be generated, reducing the concentration of airborne contaminants in the area.

#### WHEN TO APPLY GHV SYSTEMS

- Supplement LEV systems for difficult applications.
- Fabricating large 3D work pieces.
- The operator needs to shift positions frequently.
- Shops utilizing robotic cutting and hard automation.
- Thermal Cutting locations within a facility are variable.
- Personal protective equipment is used to control the operator's potential exposure.







LAYERED VENTILATION



ENERGY SAVINGS



SAFE WORKPLACE



LESS DOWNTIME

#### SAVE ENERGY COSTS WITH GHV Systems

Bomaksan designed General Hall Ventilation Systems operate based on the endorsed principle of layered ventilation, as advised by industry associations. In this systems contaminated air that rises is collected through inlet pipes (or filter unit inlet in Air Towers) positioned at heights ranging from four to six meters. Filtered air is then reintroduced into the room through source outlet pipes (or filter unit clean air outlets in Air Towers) located closer to the floor, moving at a low speed. This filtered air displaces the smoke and aids in its thermal movement. The network of ducting systems is linked to the central extraction and filtering system. The comprehensive recirculation of the cleaned air results in substantial savings of up to 70% on heating expenses during colder seasons for businesses.



Heating Cost REDUCTION



#### GHV SOL. FOR ROBOTIC CUTTING

General Hall Ventilation (GHV) solutions can be applied when LEV solution is not applicable or is not enough to capture all the pollutants. If exposure limit is exceed even with the LEV system, which is possible even with a good designed LEV system depending on the number of source, GHV solutions are required.

Designing the right GHV system depends on the layout of the workshop, purpose, robot type and cutting type. Sometimes it is not so easy to choose and design the right GHV system. In this case experienced Bomaksan engineers, project designers and solution partners can help you along the way.

#### **PRODUCT OFFERINGS**









